

## MEADOW OAK SEE-THRU LOG PLACEMENT INSTRUCTIONS

### CAUTION.....WARNING.....IMPORTANT

USE ONLY A PETERSON REAL FYRE G9 SEE-THRU BURNER WITH THIS REAL FYRE LOG SET.



M9-2-24 shown



### LOG SET IMPORTANT INFORMATION

This instruction contains log set placement for these Real Fyre logs. You must position and maintain the log layout as shown herein to ensure proper operation of the burner system. Incorrect log installation could cause flame impingement and improper combustion, resulting in soot and/or excessive by-products of combustion. DO NOT add any additional embers for this installation. Any additional embers will cause unsafe operation. **Use these logs only with a Peterson G9 see-thru burner system.**

If you experience an accumulation of black carbon (soot) on your logs it is an indication of incomplete combustion and you must correct the log placement as instructed in this manual. If significant sooting continues, stop using this gas log set.

Please read these instructions completely and carefully.

**Important:** Adequate spacing between the logs is **NECESSARY** and **MUST** be maintained. If carbon build up (sooting) exists, correct log placement before sooting becomes worse. **If any sooting occurs outside of the firebox (i.e. on the walls), turn off unit immediately and contact a qualified professional service technician.**

**WARNING:** Use **ONLY** a Peterson Real Fyre G9 see-thru burner with this Real Fyre gas log set. **Failure to do so may result in property damage or personal injury, and will void listings, certifications, and invalidate claims made to RHP.** Contact your local Real Fyre dealer if you need more information.

**This product is only warranted when used as part of a Robert H. Peterson Co. unvented burner system.**

**WARNING:** This gas log set is for use with an R.H. Peterson Co. G9 see-thru burner (and parts) ONLY.


**CAUTION:** Burn hazard! Logs will remain hot for some time after use. Use heat resistant gloves or allow logs adequate time to cool before handling.

Failure to use a Peterson G9 see-thru burner may result in a **DANGEROUS** situation and in property damage, personal injury or death, will void warranty by R.H. Peterson Co.

## MEADOW OAK SEE THRU LOG PLACEMENT INSTRUCTIONS (24" MODELS)

The underside of the bottom logs have cutouts and tabs that align over the burner. **THE BOTTOM LOGS MUST BE FULLY SEATED ON THE BURNER.** Certain logs have notches on them to allow for the logs to interlock in place.

### M9-2-24 PARTS LIST

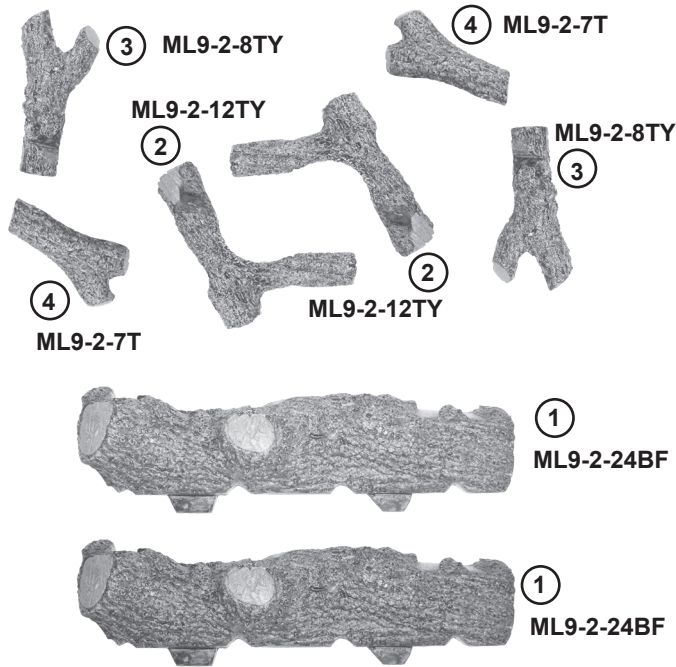


M9-2-24 log set shown

**CAUTION: Burn hazard! Logs will remain hot for some time after use.**

All items for this log set are included in one (1) box.


I

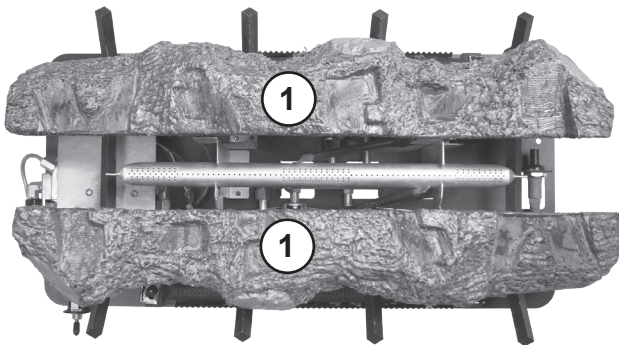

Place the bottom front logs (log #1) as shown. Slide them back on the burner, against the main burner bracket. The underside of the log has two tabs that insert into the holes found on the burner. The cutouts found on the underside of the logs will align over the grate fingers. ENSURE THE LOGS REST FLAT ON THE BURNER.


II

Logs snug against bracket

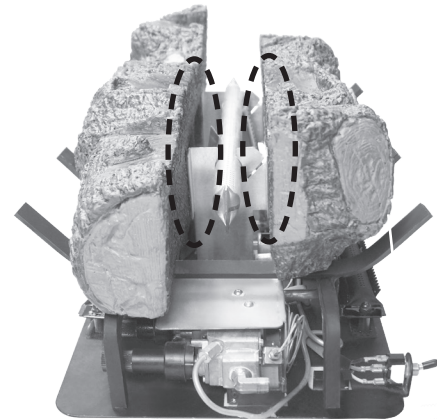


Ensure the front logs are snug up against the main burner bracket.

III

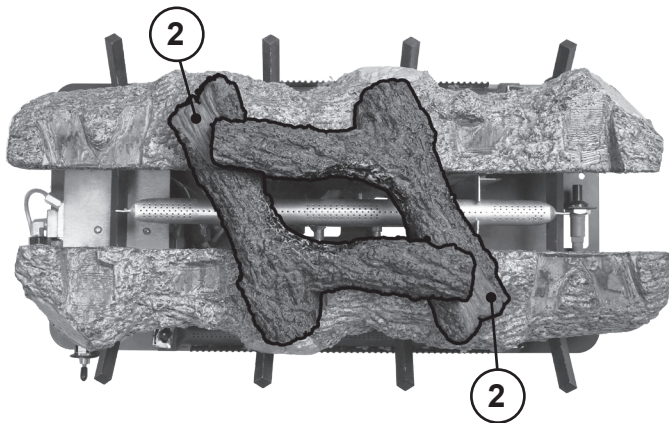


Place both middle logs (log #2) as shown. The logs should lock in place over the logs below.

IV

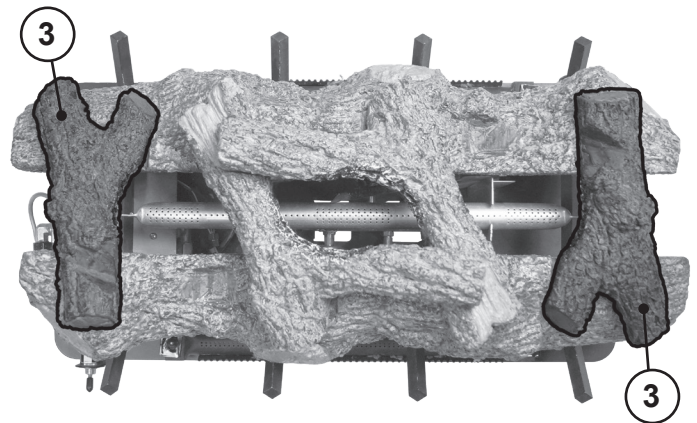

Place both top logs (log #3) as shown. The logs should lock in place over the logs below.

V

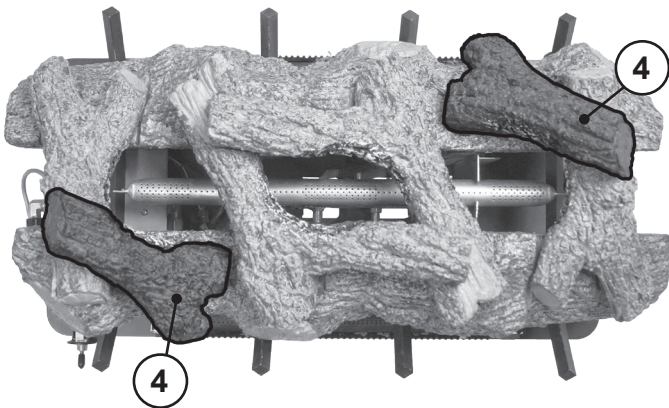

Place both top logs (log #4) as shown. The logs should lock in place over the logs below.

VI



**Final Log Placement**

After setting the logs into position as described above, ensure each is properly and firmly seated. The vent-free gas log set will not function as intended if the logs are not correctly positioned. When placed properly, the flames will not impinge any portion of the logs. Periodically check the positioning of all logs to ensure proper log placement and stability. If any flame is impinging the logs, recheck log placement. Adjust to conform with instructions. **There should be no flame impingement on the logs.**