RH PETERSON CO.

realfyre
PREMIUM GAS LOGS

17 VALVE HEAT SHIELD REPLACEMENT INSTRUCTIONS

Model# HS-35

INSTALLER: Leave these instructions with consumer.
CONSUMER: Retain for future reference.

This heat shield is for replacement on 17 valve models. To install, follow the steps below:

1. Remove the old/existing **valve** heat shield (from the valve).

Note: DO NOT remove the existing regulator heat shield (if equipped).

2. Cover the valve with the heat shield as shown in Fig.1-1 and Fig.1-2.

Refer to the owner's manual supplied with your burner/ valve system for all other product details.

TO PREVENT VALVE DAMAGE AND FAILURE:

IT IS CRITICAL THAT THE HEAT SHIELD BE PLACED CORRECTLY OVER THE VALVE PRIOR TO OPERATION.

KEEP SAND GRANULES, LAVA GRANULES, AND ALL FOREIGN OBJECTS AWAY FROM THE PILOT ASSEMBLY, VALVE ASSEMBLY, AND HEAT SHIELD DURING MEDIA PLACEMENT AND AT ALL TIMES.

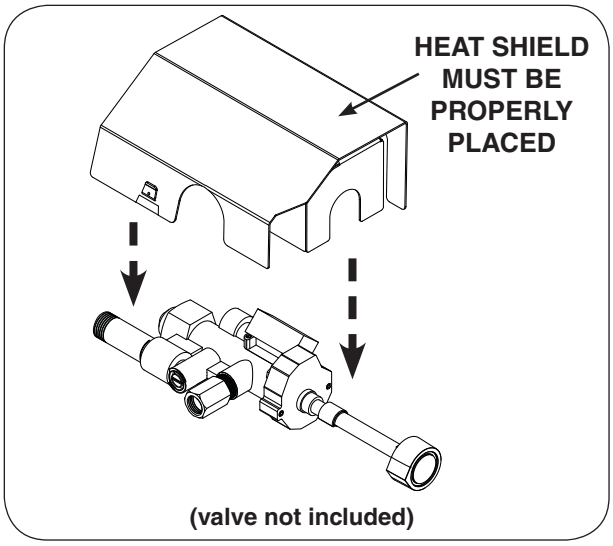

Fig. 1-1

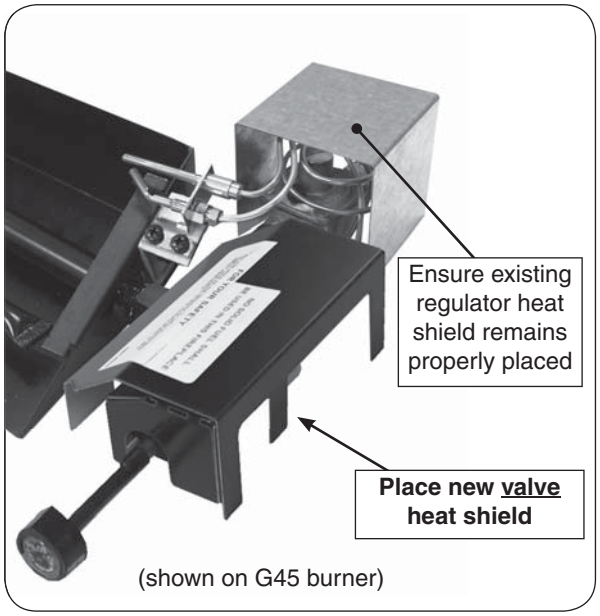

Fig. 1-2