


CHARRED HIGHLAND BIRCH LOG PLACEMENT INSTRUCTIONS

CAUTION.....WARNING.....IMPORTANT

USE ONLY A PETERSON REAL FYRE G19A OR ODG15 BURNER WITH THIS REAL FYRE LOG SET.

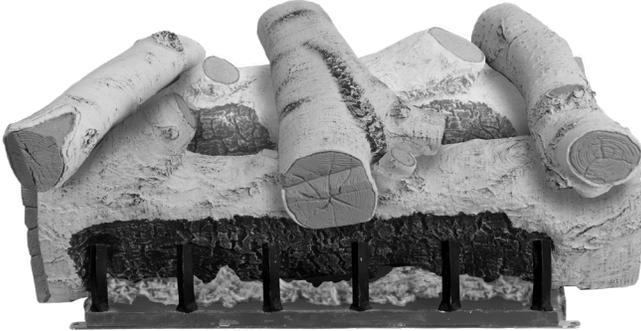

CHHLB-24 on G19A shown

This log set is to be installed along with the glowing embers or fyre stones that are supplied with your G19A or ODG15 burner system. Refer to the parts list in the main owner's manual.

LOG SET IMPORTANT INFORMATION

This instruction contains log set placement for these Real Fyre logs. You must position and maintain the log layout as shown herein to ensure proper operation of the burner system. Incorrect log installation could cause flame impingement and improper combustion, resulting in soot and/or excessive by-products of combustion. DO NOT add any additional embers or fyre stones (as applicable) for this installation. Any additional embers or fyre stones (as applicable) will cause unsafe operation. **Use these logs only with a Peterson G19A or ODG15 burner system.**

If you experience an accumulation of black carbon (soot) on your logs it is an indication of incomplete combustion and you must correct the log placement as instructed in this manual. If significant sooting continues, stop using this gas log set.

Please read these instructions completely and carefully.

Important: Adequate spacing between the logs is **NECESSARY** and **MUST** be maintained. If carbon build up (sooting) exists, correct log placement before sooting becomes worse. **If any sooting occurs outside of the firebox (i.e. on the walls), turn off unit immediately and contact a qualified professional service technician.**

WARNING: Use **ONLY** a Peterson Real Fyre G19A or ODG15 burner with this Real Fyre gas log set. **Failure to do so may result in property damage or personal injury, and will void listings, certifications, and invalidate claims made to RHP.** Contact your local Real Fyre dealer if you need more information.

This product is only warranted when used as part of a Robert H. Peterson Co. unvented burner system.

WARNING: This gas log set is for use with an R.H. Peterson Co. G19A or ODG15 burner (and parts) ONLY.

CAUTION: Burn hazard! Logs will remain hot for some time after use. Use heat resistant gloves or allow logs adequate time to cool before handling.

Failure to use a Peterson G19A or ODG15 burner may result in a **DANGEROUS** situation and in property damage, personal injury or death, will void warranty by R.H. Peterson Co.

CHARRED HIGHLAND BIRCH LOG PLACEMENT (18", 24", 30" MODELS)

The underside of the bottom logs have holes that align over pegs found on the burner. **THE BOTTOM LOGS MUST BE FULLY SEATED ON THE BURNER.** Certain logs have notches on them to allow for the logs to interlock in place.

CAUTION: Burn hazard! Logs will remain hot for some time after use.

G19A burner system shown here.

IMPORTANT:

For 24" and 30" log sets, if installing on an ODG15 burner system, refer to the **INSTALL DECORATIVE MEDIA** section in the ODG15 owner's manual and install the fyre stones in conjunction with this log placement instruction.

All items for this log set are included in one (1) box.

CHHLB-(18, 24, 30) PARTS LIST


18"
CHHLBL-11TC

24", 30"
CHHLBL-13TC



18"
CHHLBL-11TL
24", 30"
CHHLBL-12TL


18"
CHHLBL-11TR
24", 30"
CHHLBL-12TR



18"
CHHLBL-15BR

24"
CHHLBL-22BR


30"
CHHLBL-22BR

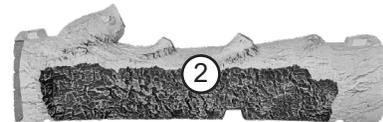

18"
CHHLBL-18BF

24"
CHHLBL-24BF

30"
CHHLBL-30BF

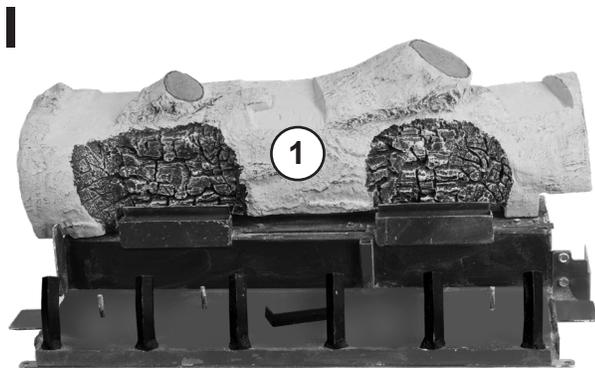

Place the rear log (log #1) as shown. The holes found on the underside of the log should align over the pegs found on the burner. **ENSURE THE LOG RESTS FLAT ON THE BURNER.**




Place the front log (log #2) as shown. The holes found on the underside of the log should align over the pegs found on the burner. **ENSURE THE LOG RESTS FLAT ON THE BURNER.**



Place the top left log (log #3) as shown. It should lock in place on the front and rear logs.


CHARRED HIGHLAND BIRCH LOG PLACEMENT (18", 24", 30" MODELS) (CONT.)

IV

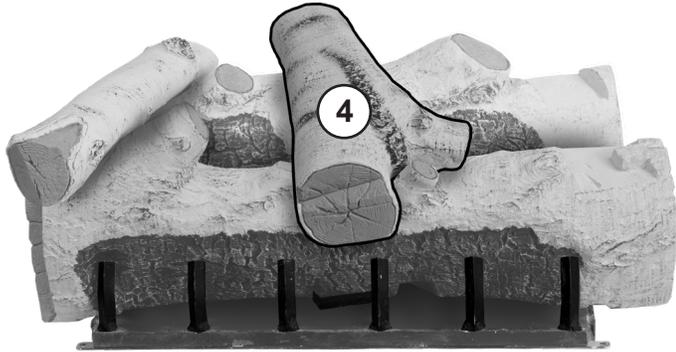

Place the top center log piece (log #4) as shown. The log should lock in place over the front and rear logs.

V

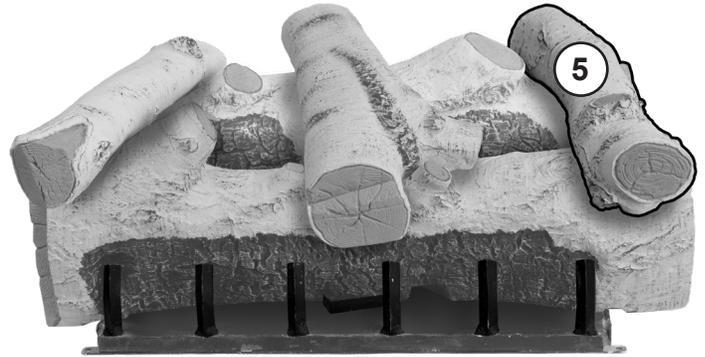


Place the top right log piece (log #5) as shown. The log should lock in place over the front and rear logs.

After setting the logs into position as described above, ensure each log is properly and firmly seated. The vent-free gas log set will not function as intended if the logs are not correctly positioned. When placed properly, the flames will not strike any portion of the logs. Periodically check the positioning of all logs to ensure proper log placement and stability. If any flame is striking the logs, recheck log placement. Adjust to conform with instructions. **There should be no flame impingement on the logs.**

VI

For ODG15 burner systems, proceed to the owner's manual for fyre stone placement.
For G19A burner systems, continue to the following steps below for glowing ember placement.

VII

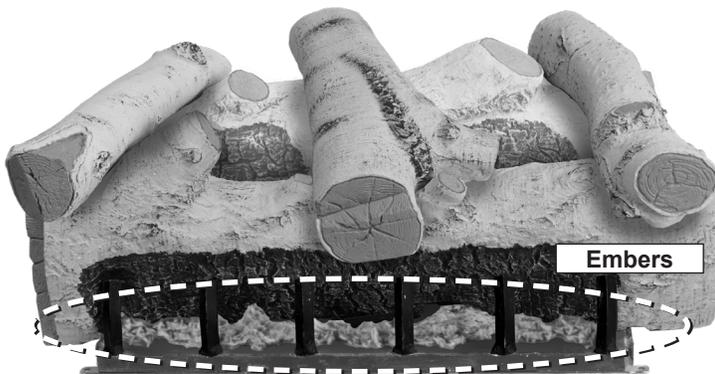

Place the glowing embers (supplied with the burner system) evenly over the front burner ports as shown. Break up any clumps that may have developed during shipment. Store any excess embers if applicable.

VIII



Evenly spread glowing embers over the front burner ports as shown.

CAUTION: It is imperative that all the ports are covered with fyre stones.

Refer back to your burner systems owner's manual to complete installation.