

AOG
AMERICAN OUTDOOR GRILL
Accent Color Panels
 for Grill Cart Base Doors



Cart Base Models	Accent Color Panel Models
24CRT-25	CRT-24-***-2
30CRT-25	CRT-30-***-2
36CRT-25	CRT-36-***-2
***Colors: BLK, WHT, PRD, FBE, SGY, HTL, FGN, TYW	

Table 1 - Model compatibility

These accent color panels are for installation on AOG grill cart base models listed on Table 1. Call your local dealer for ordering information.

Note: Color tones may vary.

PREPARE FOR INSTALLATION

CAUTION: Before installing the accent color panels, ensure the appliance is OFF and completely cool.

Important: Ensure the casters are locked securely when installing the accent color panels to the grill cart base.

1. Open the cabinet doors and slide up to remove it from its hinges. See Fig. 1-1.
2. Lay on a protected flat surface and use a damp clean cloth (or soapy water solution) and/or a grill cleaner to clean the door panel surface of grease and dirt before application. Always wipe with the grain.



Fig. 1-1 Remove cabinet door

Installation continued on the following page.

INSTALL ACCENT COLOR PANEL

1. Place the accent color panel flat on top of the cabinet door. See Fig 2-1.
2. Slide the top portion of the panel down into place. Orient the panel so the back flange hooks over the door as shown in Fig 2-2.
3. Hook flange on the bottom of the panel along the base of the door. See Fig. 2-3.
4. Use a 1/4" nut driver to install the two hex screws (provided) on the support flange of the cabinet door as shown in Fig. 2-3.
5. Reinstall doors back onto the cart base. See Fig. 2-4.

CLEANING

Use a soapy water solution and a clean cloth to remove grease and dirt from the surface of the accent color panels.



Fig. 2-1 Place accent color panel

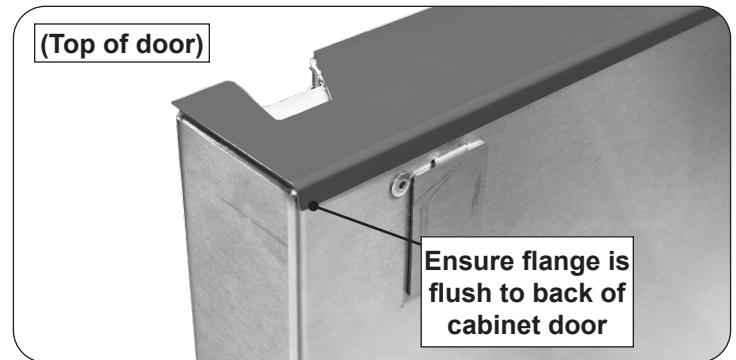


Fig. 2-2 Position top edge of color panel

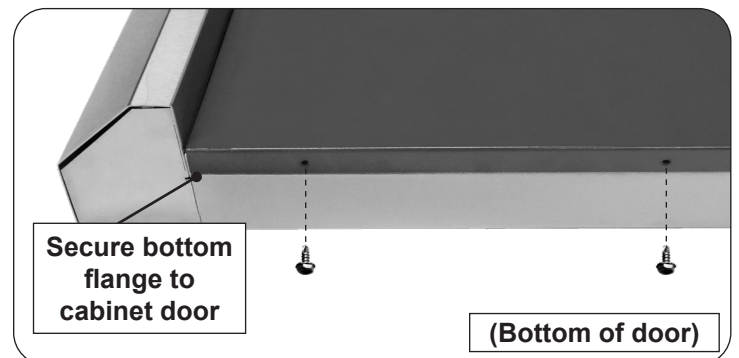


Fig. 2-3 Install hex screws



Fig. 2-4 Installation complete