




## LCD DISPLAY

Model# RFD-08-DIGHDR


**INSTALLER:** Leave these instructions with consumer.  
**CONSUMER:** Retain for future reference.

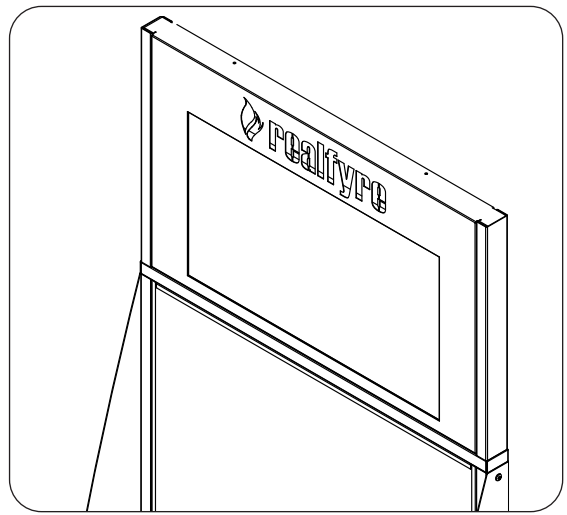

This LCD display is for installation on Real Fyre RFD(A)-08 3-tier display racks. It presents video of Real Fyre burner systems. To install, see the following steps.

### **BEFORE INSTALLATION:**

Before installing the LCD display, remove any existing Real Fyre signage from your 3-tier display rack. Locate and remove the nuts securing the signage in place. See Fig. 1-1. If needed, remove the display rack's header panel to access the bolts and loosen the nuts. Refer to the display rack installation instructions for guidance on removing the header panel.

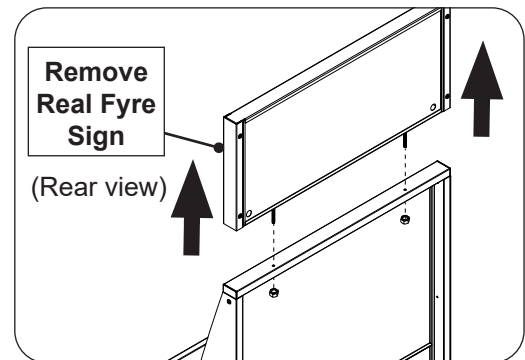


**Fig. 1-1** Remove signage, if applicable

## INSTALLATION

### INSTALLATION

1. Ensure the 3-tier display rack is assembled and ready for the LCD display to be mounted.
2. Take the LCD display and orient it over the display rack and align it to the two holes. See Fig. 1-2.
3. Secure the display with the provided bolts and nuts. See Fig. 1-2.
4. If the 3-tier display rack is being setup for the first time, refer to the rack instructions for details on tightening the bottom panel screws.

LCD display User Guide is located on the following page.

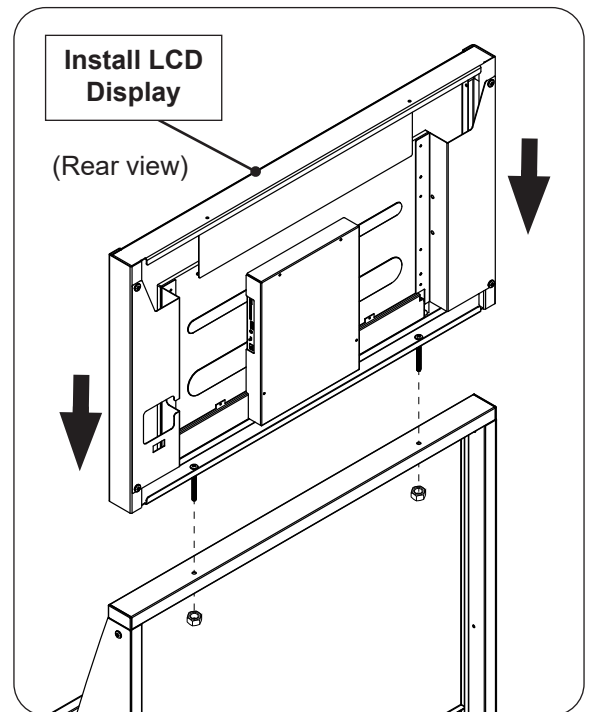

**Fig. 1-2** Install LCD display

## MEDIA & POWER INPUTS

**Mini USB:** Mini USB input port

**SD Card:** SD Card input port (SD) High-speed, compliant with SD 2.0 system specifications, supports 1GB-64GB

**USB:** USB input port Supports USB 1.0 and 2.0 (480Mbps high-speed transmission).

**AUDIO OUTPUT:** 3.5mm Stereo mini female jack

**ON/OFF:** Controls the main power of the LCD display unit

**Power:** DC 12V input

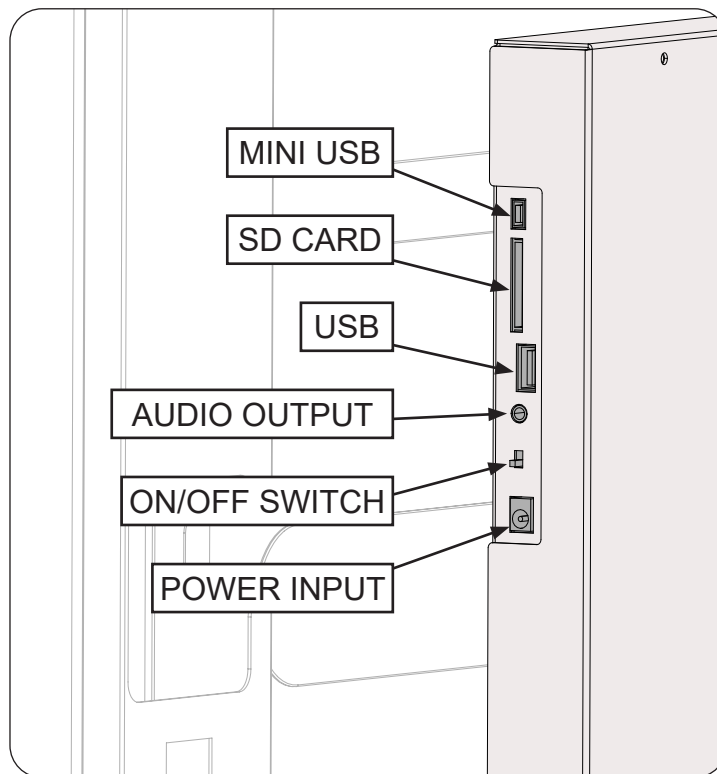


Fig. 2-1 Media & power inputs detail

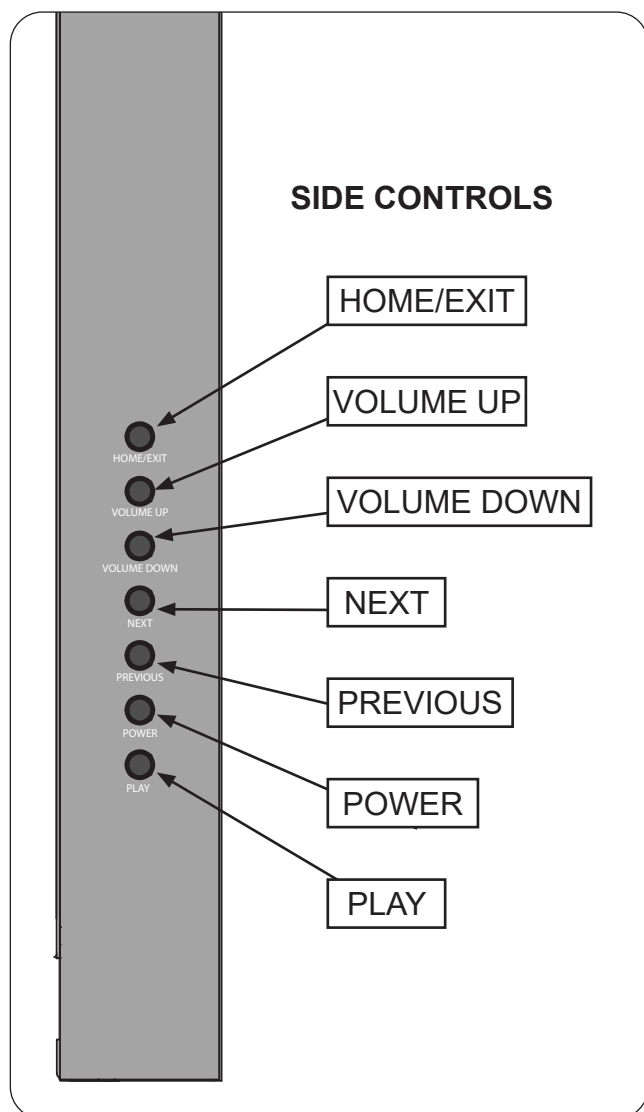


Fig. 2-2 Side controls detail